


## Low Loss SAW 1221.4 MHz Filter Bandwidth 1.75 MHz

Part Number A070-1221.4M1

### Typical performance

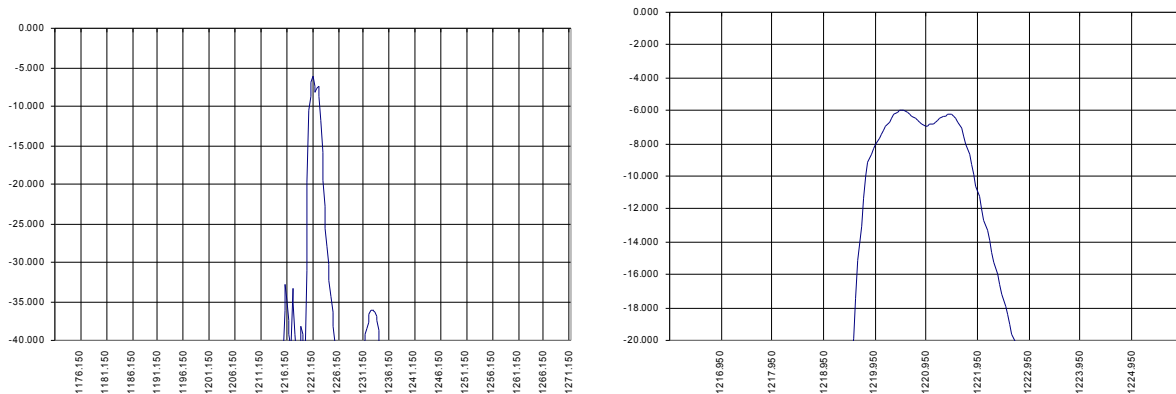

### Specifications

Parameter	Unit	Min	Typ	Max
Central frequency	MHz	1220.90	1221.40	1222.00
Inserted loss	dB	-	5.5	6.5
Bandwidth @-2dB	MHz	-	1.25	-
Bandwidth @-30dB	MHz	-	5.00	-
Amplitude ripple	dB	-	1.0	-
Ultimate rejection	dB	40.0	45.0	-
Substrate		-	36YX quartz	-
Temperature range	°C	-55.0	22.0	85.0

#### Notes:

1. The design, manufacturing process, and specifications of this filter are subject to change.
2. Specification valid for measurements in AEC Design test fixture

### Case

### Matching

