

# SAW Low Loss Filter 1860 MHz



Bandwidth 95 MHz

Part Number A153-1860M1

Complies with Directive 2002/95/EC (RoHS)

PRELIMINARY DATA

## Typical performance

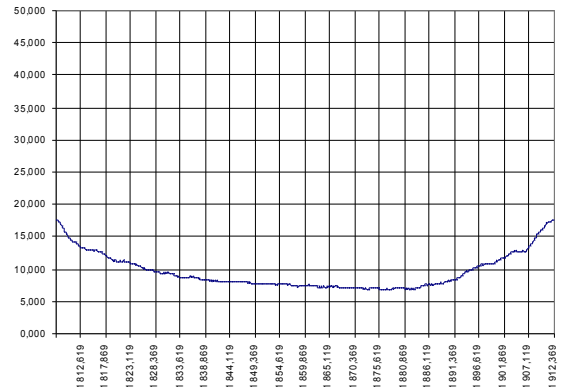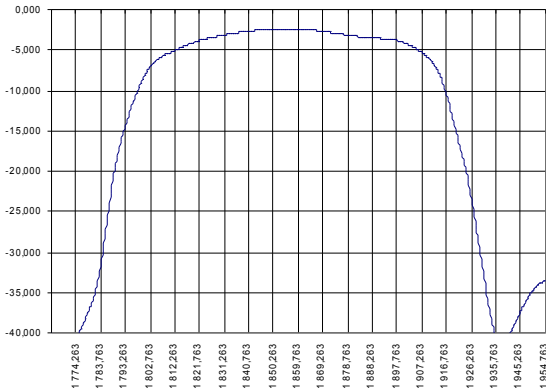


## Specifications

Parameter	Unit	Min	Typ	Max
Central frequency	MHz	1857	1860	1863
Inserted loss (unmatched)	dB	2.3	2.4	2.8
Bandwidth @-3dB	MHz	95	97	100
Bandwidth @-30dB	MHz	147	149	152
Amplitude ripple (in bandwidth 75 MHz)	dB	1.0	1.5	2.0
Group Delay variation	nsec	-	8	10
Substrate	-	-	49LNO	-
Temperature range	°C	-55	22	85

### Notes:

1. The design, manufacturing process, and specifications of this filter are subject to change.
2. Specification valid for measurements in AEC Design test fixture.

## Case

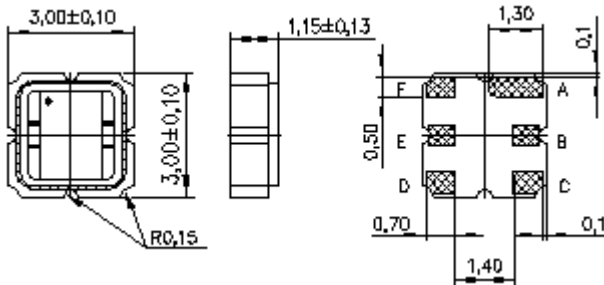

## Matching

